





LED Wall Pack Light

60W~120W



LED Wall Pack combines the look of a traditional wall pack with the benefits of LED. An efficient alternative to metal halide, these wall packs deliver bright, uniform light while providing energy savings and rebate eligibility. A long 50,000 hour rated life significantly decreases maintenance labor and material costs over the life of the fixture.

The robust die-cast aluminum housing incorporates an impact resistant borosilicate glass lens. An integrated photosensor comes standard for dusk-to-dawn control (Optional). It mounts directly to a standard junction box for easy retrofit of traditional fixtures.



Features:

- * Light Efficiency: 125lm/W;
- * High bright EPISTAR LEDs;
- * High-transmittance and anti-UV Polycarbonate lens;
- * Excellent thermal management design;
- * Die-casting aluminum with polyester powder coat finish;
- * IP65/IK08 rating for outdoor usage;
- * Energy savings, no UV and IR radiations, emits low heat;
- * 0-10V dimming, an integrated photocell optional
- * UL/cUL/FCC/CE/RoHS approval;
- * 5 years warranty.



Specifications:

Model				
Power	60W	80W	100W	120W
Luminous Flux	7500lm	10000lm	12500lm	15000lm
Luminous Efficacy	125lm/w			
Light Source	Epistar LED			
Operation Temp	-40°C to +45°C			
CCT	3000K/4000K/5000K/5700K/6500K			
CRI	>70			
Life Span	50,000 hours			
Voltage	100-277VAC/120-347VAC/277-480VAC, 50-60Hz			
Beam Angle	120°			
PT	>0.95			
Warranty	5 Years			

Details:

Housing

Die cast aluminum, comes in a bronze powder coat finish

Easy installation

Hinged wiring access and conduit entries on the back, and side to make installation a snap.

IP65 rated

IP65 rating for complete protection against dust and low-pressure water jet ingress.

Lens

Outfitted with a clear polycarbonate lens, a high efficacy of up to 125 lm/W

Integrated photocell(optional)


Automatically control when the wall packs turn on for even greater energy savings.

High reliable LED drivers

0-10V dimming, offer 6KV surge protection for increased versatility and durability.

Field-adjustable control


Optional a field-adjustable CCT switch inside the fixture that allows you to choose between 3000, 4000 and 5000K color temperatures

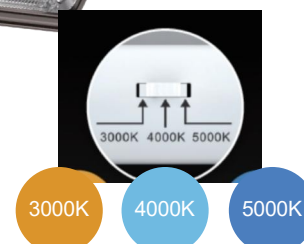

Dimension:

Unit: mm



- L=364MM
- W=233MM
- H=163MM

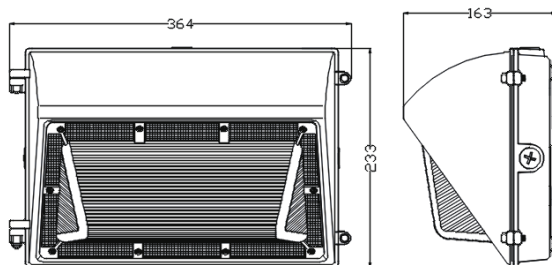

Optics:

Package:

Model				
Package Size	370x280x205mm	370x280x205mm	370x280x205mm	370x280x205mm
Weight	1.08kg	2.17kg	2.17kg	2.46kg

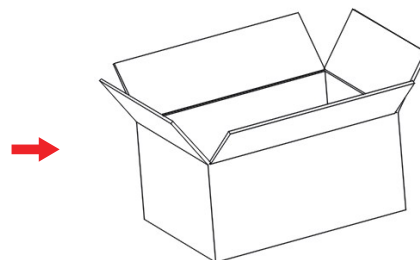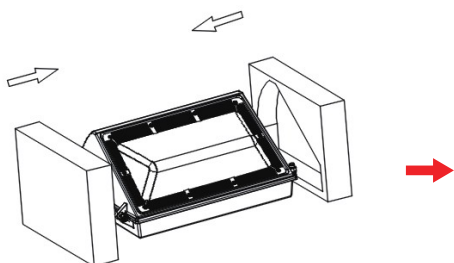

Application:

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters

