





Adjustable LED Full-Cutoff Wall Pack



THiNK Adjustable LED Full-Cutoff Wall Pack series can be widely used for indoor or outdoor lighting applications. The head tilts from 0° to 90°, allowing you to direct light in your desired angle. Durable and suitable for wet locations, it is an ideal fixture for mechanical or electronic processing workshops, storage warehouses, steel mills, gas stations, toll booth, waiting rooms, the platforms of railway station, indoor stadiums.



Think Cables, LLC

Tel: +1-619-372-4431 E-mail: steve.arnquist@bulkable.com

Features:

- * Light efficiency: 140lm/W;
- * High-bright EPISTAR LEDs;
- * High-transmittance and anti-UV Polycarbonate lens;
- * 0° to 90° field adjustable angle dial for flexible installation;
- * Excellent thermal management design;
- * Die-casting aluminum with polyester powder coat finish;
- * IP66/IK08 rating for outdoor usage;
- * Energy savings, no UV and IR radiations, emits low heat;
- * 0-10V dimming, an integrated photocell optional
- * UL/CUL/FCC/CE/RoHS approval;
- * 5 years warranty






Specifications:

Model	RMS-L2214
Wattage	40W/60W/100W/120W
Luminous Flux	140lm/W
Beam Angle	90°x65°
Color Temperature	2700K-6500K
Input Voltage	AC100-277V, 50-60Hz
LED Brand	Epistar
CRI	Ra>70
PF	>0.9
Life Hours	50,000
Operation Temperature	-35°C~55°C
IP Rating	IP66



Dimension:

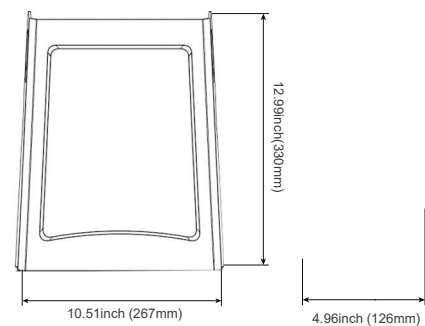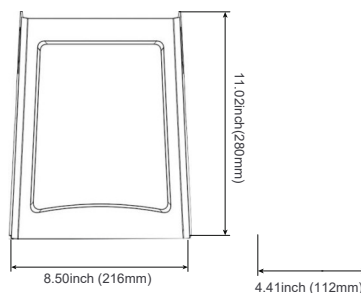

Details:

Adjustable Angle Dial

0° to +90° tilt adjustments to meet the needs of customers with different lighting angles.



Easy installation

Hinged wiring access and conduit entries on the back, sides, top and bottom make installation a snap.

Housing

Die cast aluminum, comes in a bronze powder coat finish

Lens

Outfitted with a clear polycarbonate lens, a high efficacy of up to 140 lm/W



Integrated photocell(optional)


Automatically control when the wall packs turn on for even greater energy savings.

High reliable LED drivers

0-10V dimming, offer 6KV surge protection for increased versatility and durability.


Field-adjustable control

Optional a field-adjustable CCT switch inside the fixture that allows you to choose between 3000, 4000 and 5000K color temperatures

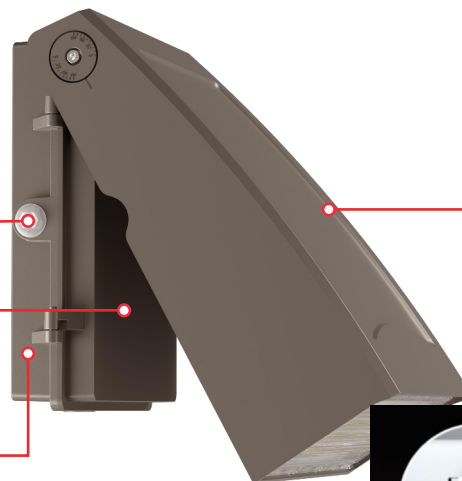

IP66 rated

IP66 rating for complete protection against dust and low-pressure water jet ingress.



3000K

4000K

5000K