


LED High Bay Light

(Power Adjustable Version)



**Switchable Wattage,
Less SKU, optimize
inventory turnover**



Features:


- * Light Efficiency: 150lm/W;
- * Unique design, multiple power settings controlled by a dip switch
- * High bright EPISTAR LEDs;
- * Optics of 120°/ 90°/60°available on request;
- * High-transmittance and anti-UV Polycarbonate lens;
- * Excellent thermal management design;
- * Die-casting aluminum with polyester powder coat finish;
- * IP65/IK08 rating for outdoor usage;
- * Hook hanging and U-bracket installation are available;
- * Energy savings, no UV and IR radiations, emits low heat;
- * 0-10V dimming for low power consumption;
- * ETL/cETL/SAA/DLC/C-TICK/FCC/CE/RoHS approval;
- * 5 years warranty

Specifications:


Model	
Wattage	100W(80W/60W),150W(120W/90W), 200W(150W/120W),240W(200W/150W)
Luminous Flux	150LM/W
Beam Angle	120°/90°/60°
Color Temperature	3000K~6000K
Input Voltage	AC100-277V, 50-60Hz
LED Brand	EPISTAR
CRI	Ra>70
PF	>0.9
Life Hours	50,000
Operation Temperature	-35°C~55°C
IP Rating	IP65

Dimension:

Unit: mm

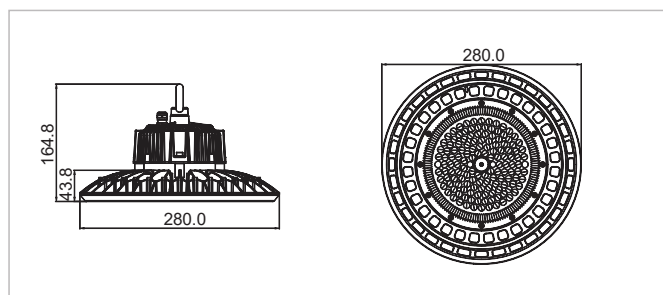


100W(80W/60W),150W(90W/120W)

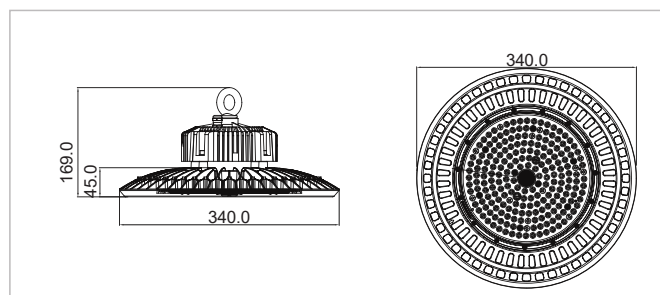

200W(150W/120W),240W(200W/150W)

Details:



- High bright EPISTAR SMD 2835, Lm80 listed. Whole lamp is 150LPW



- LIFUD LED driver, 0-10V dimming, high reliable, offer 5 years warranty



- The switch selector allows customers to simply select different wattages.



- Die cast hook mount standard for ease of installation, surface mounted bracket optional.


- Die cast aluminum alloy body, cooling fins provide maximum heat dissipation.



- 3 kinds of beam angle options to suit different lighting requirements in different areas.




- 60°/90° of PC/Aluminum Reflectors are optional.



- IP65 waterproof for wet location

Application:

LED UFO high bay fixtures are ideal for Warehouses, Manufacturing Facilities, Gymnasiums, Aviation Hangars, Convention Centers, Big Box Retail Stores, Cold Storage Facilities.












200W/240W

Installation Instruction:

1. Hook hanging Installation

2. Bracket Mounted Installation

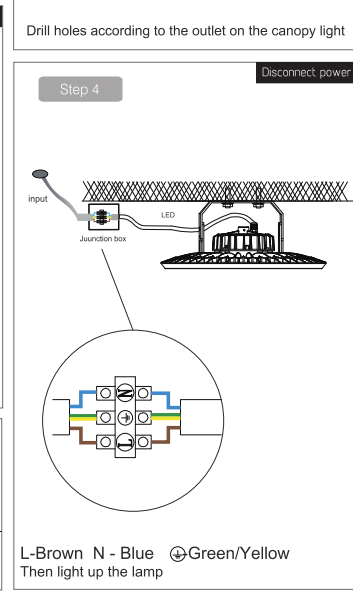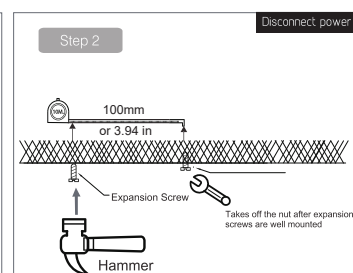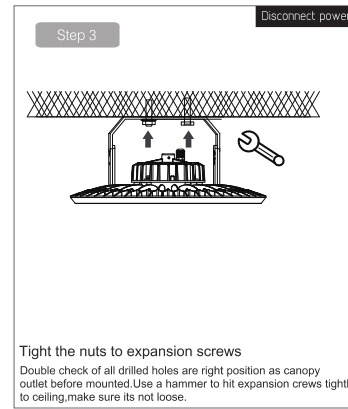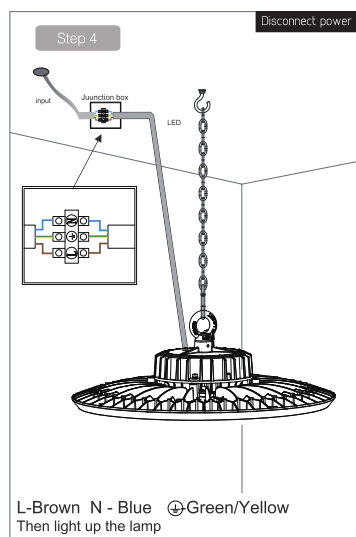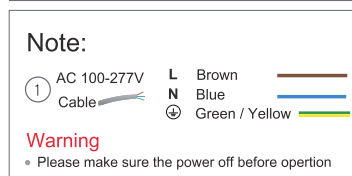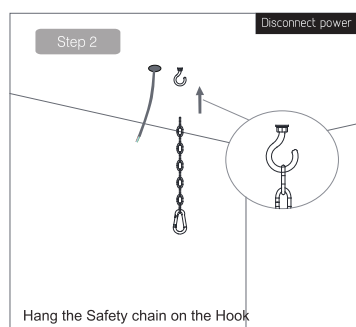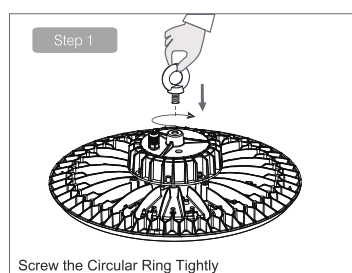

Optional Accessories:

Lifud	60°/90°	120°	ALU Reflector	PC Reflector	Safety Cable
O-Hook	G-Hook	U-bracket	US plug	EU plug	AU plug