




UFO LED High Bay Light

100W/150W/200W



Think Cables, LLC

Tel: +1 619-372-4431 E-mail: steve.arnquist@bulkable.com


Features:

- * Compact size and light weight, save shipping cost;
- * Light Efficiency: 150lm/W & 170lm/W optional;
- * Optics of 60°/90°/120° available on request;
- * High-transmittance and anti-UV Polycarbonate lens;
- * Excellent thermal management design;
- * Die-casting aluminum with polyester powder coat finish;
- * IP65/IK08 rating for outdoor usage;
- * Easy installation and low maintenance;
- * Energy savings, no UV and IR radiations, emits low heat;
- * ETL/cETL/FCC/CE/RoHS approval;
- * 5 years warranty




Specifications:

Wattage	100W/150W/200W
Luminous Flux	150lm/W/170lm/W
Beam Angle	60°/90°/120°
Color Temperature	3000K~6000K
Input Voltage	100-277Vac, 50/60Hz
Life Hours	50,000
LED Brand	Epistar
CRI	Ra>70
PF	>0.9
Dimmable	1-10V dimming optional
Operation Temperature	-35°C~55°C
IP Rating	IP65
Warranty	5-year
Mounting Modes	Hook hanging/U-bracket optional

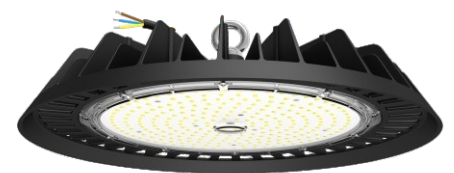


Dimension:


Unit: mm

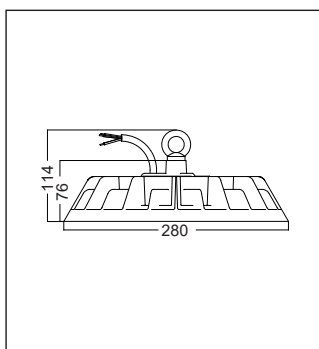

100W

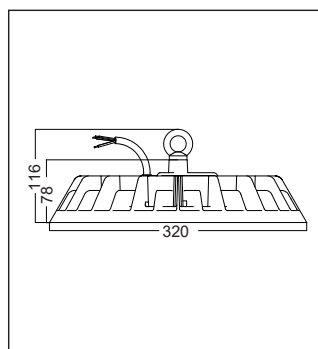

150W

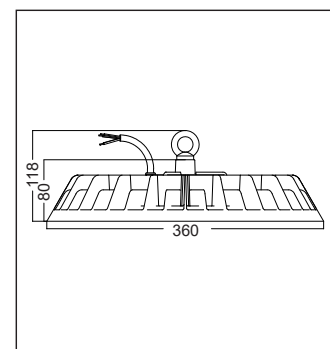


200W

Details:



EPISTAR

- LM80 listed Epistar branded LED chip. 150LPW and 170 LPW are optional

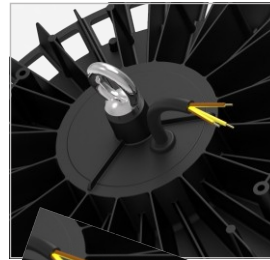

- High reliable LED driver, high reliable, offer 5 years warranty.



- 3 kinds of beam angle for option depend on different working environment.




- Die cast aluminum alloy body, Durable black powder coat, cooling fins and hollow design, provide maximum heat dissipation, lifespan > 50,000hrs.




- Lens is made of polycarbonate, have a good impact resistance and non-friable, high light transmittance.



- Hook mount standard for ease of installation, surface mounted baracket and G-hook are optional.





- LED and heat sink are parallel, no dark area, no shadow.

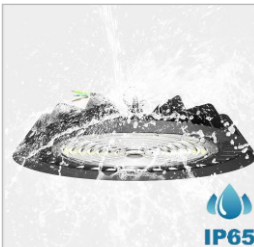


- IP65 waterproof for wet location



90° Aluminum Reflector (optional)

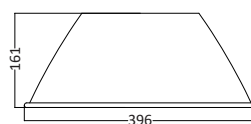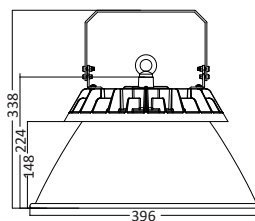

100W

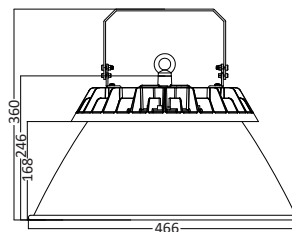

100W

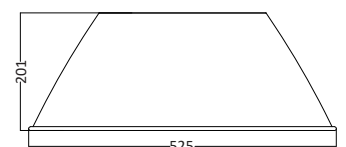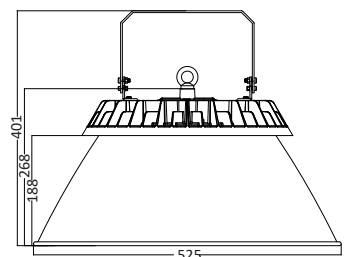

100W

Packaging:

Wattage	100W	150W	200W
N.W.	2.0kg	2.5kg	3.1kg
G.W.	2.7kg	3.2kg	3.8kg
Carton Size	L300*W300*H160mm	L350*W350*H160mm	L390*W390*H160mm





- Designed with compact size and light weight, convenient for shipping and stock.
- The loading quantity can load more 1/3 than other's same wattages.
- Save much costs.

Product	Ordinary		Ordinary		Ordinary	
Wattage	100W		150W		200W	
20GP loaded qty	1596pcs	2044pcs	1170pcs	1476pcs	760pcs	1260pcs
40HQ loaded qty	4856pcs	4800pcs	2556pcs	3502pcs	1810pcs	2952pcs

Application:

LED UFO high bay fixtures are ideal for Warehouses, Manufacturing Facilities, Gymnasiums, Aviation Hangars, Convention Centers, Big Box Retail Stores, Cold Storage Facilities.)

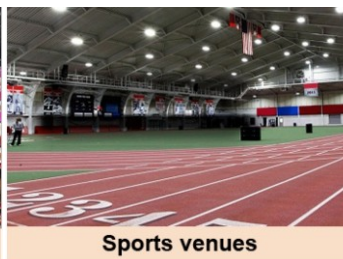
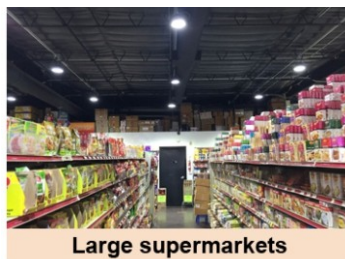


Installation Instruction:


Turn off the
Power switch

IP65 waterproof junction box
(Not equipped with lights)


Fixture input wire




CE




UL




DIM

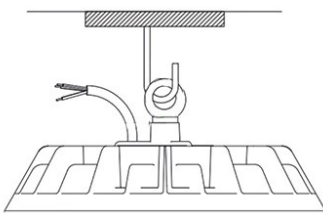


Lifting ring installation
method

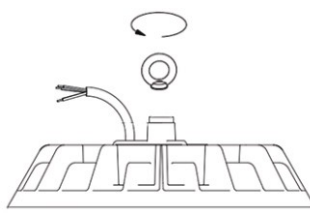


1. Screw the lifting ring into
the tooth hole of the lamp
and tighten it (as photo)

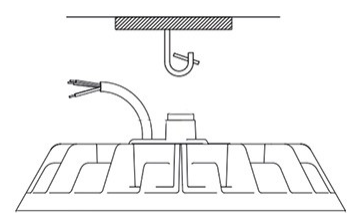


2. Attach the installed
fixture to the top hook

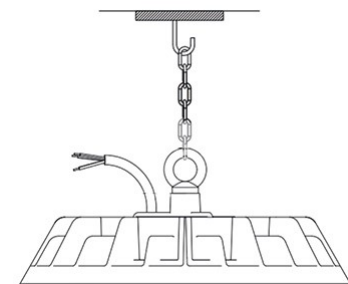

Hoisting chain installation
method

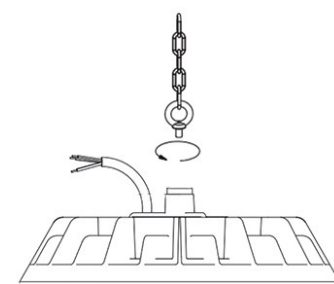

1. Screw the lifting chain into
the tooth hole of the lamp
and tighten it (as photo)

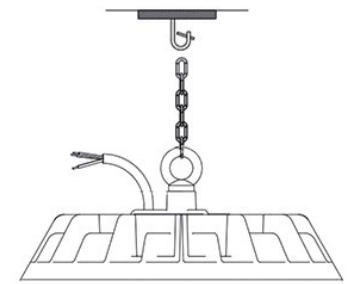

2. Attach the installed
fixture to the top hook