



Armored Distribution 900um

Description

Designed for use within buildings, data centers, telecom rooms, and workstations, this cable is available with both Riser and Plenum rated jackets. Factory-terminated to custom lengths, it significantly reduces installation time and labor costs by eliminating the need for on-site terminations.

With extra protection for rodent, direct buried.

Availbale in SM / MM (OM1. OM2, OM3. OM4)

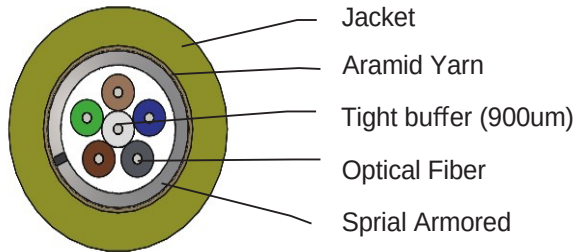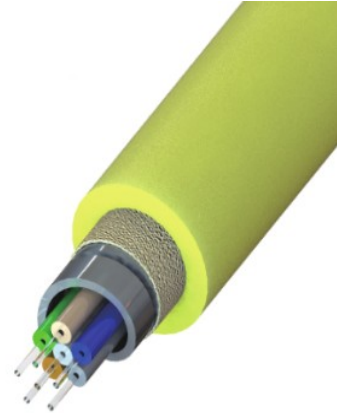

Spec.

Fiber Counts	2-4	6	12	24
Fiber Color	Nutral			
Tight Buffer (mm)	0.9 ± 0.1			
Tight Buffer Color	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification			
Strength memeber	Aramid Yarn + Water Blocing yarn			
Sprial Armored Dia.	2.8 ±0.2mm	4.2 ±0.2mm	5.7 ±0.2mm	7.2 ±0.2mm
Cable O.D.	4.5 ±0.3mm	6.0 ±0.3mm	7.5 ±0.3mm	9.0 ±0.3mm
Jacket Color	Aqua, Yellow, Black, Orange			
Jacket Material	PE / LSZH / PVC			
Weight (kg/km)	~15 kg/km	~28 kg/km	~40 kg/km	~66 kg/km
Max. Tensile Load	≥ 440N	≥ 440N	≥ 500N	≥ 600N
Mini. Bend Radius	~10 Ø(Cable O.D.)			
Max. Side Pressure	≥3000N			