
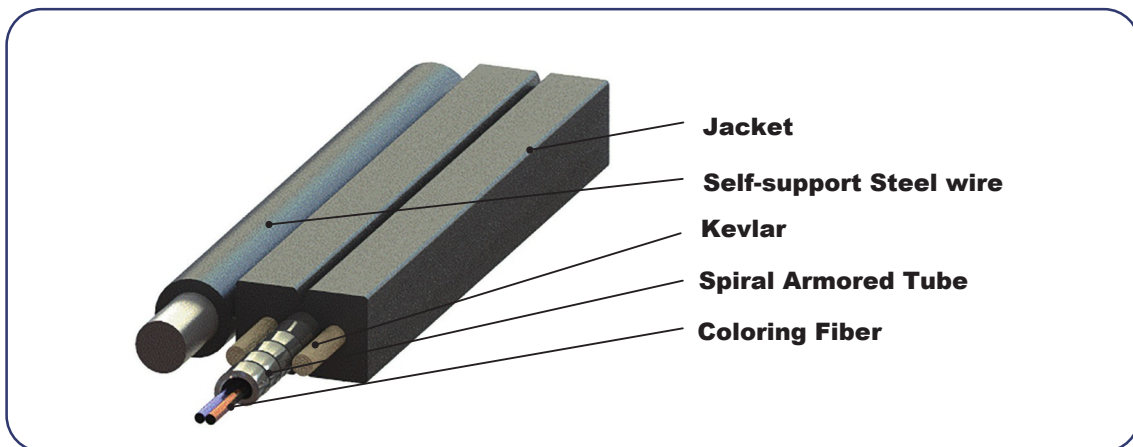


Armored Drop

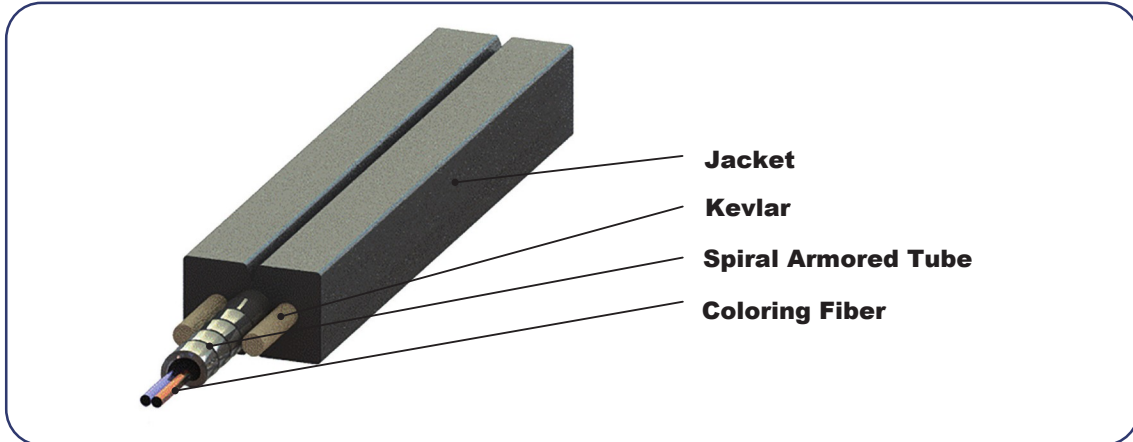

Item	Specifications	
Cable Item	SS Armored Flat Drop Cable	NSS Armored Flat Drop Cable
Fiber Item	SM	
Fiber Counts	1 / 2	
Diameter(mm)	$5.3 \pm 0.3 \times 2.0 \pm 0.2$	$3.1 \pm 0.2 \times 2.0 \pm 0.2$
Bend Radius (mm)	10xOD ~ 15xOD	
Operation Temp.(°C)	-10~60°C	
Storage Temp.(°C)	-30~70°C	