


Armored mini tube cable

Description

Designed for use within buildings, FTTH, telecom rooms, and workstations, this cable is available with Self-supported type design. Factory-terminated to custom lengths, it significantly reduces installation time and labor costs by eliminating the need for on-site terminations with Dry water-blocking system

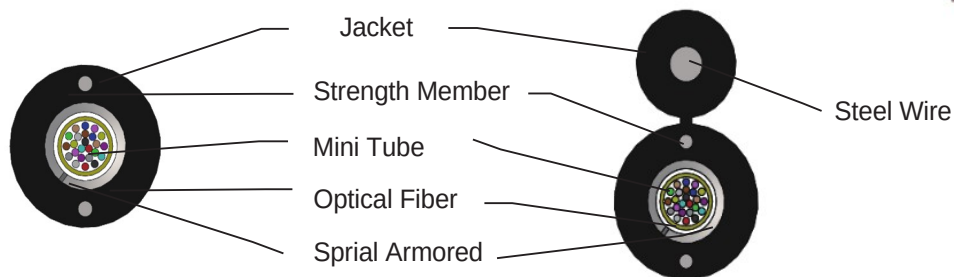

Spec.

Fiber Counts	2-12F	13-24F
Fiber Color	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification	
自持 Steel Wire (Self-Supporting)	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification	
Strength memeber	Aramid Yarn + Water Blocing yarn	
Sprial Armored Dia.		
Cable O.D. (Non Self-Supporting)	2.2 ±0.3mm	2.8 ±0.3mm
Cable O.D. (Self-Supporting)	7.4 ±0.3mm	7.8 ±0.3mm
Jacket Color	5.3 x 9.1 ±0.3mm	Black 5.7 x 10 ±0.3mm
Jacket Material	LSZH	
Weight (kg/km)	~40 kg/km	~55 kg/km
Max. Tensile Load	≥440N	
Mini. Bend Radius	~10 Ø(Cable O.D.)	
Max. Side Pressure	≥3000N	