
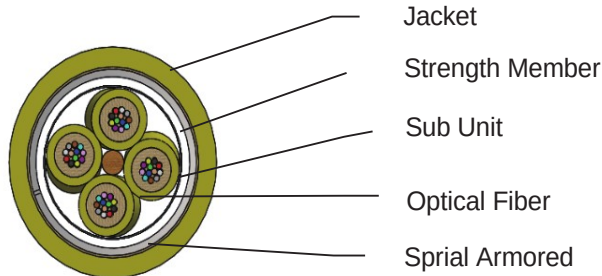


Armored Trunk Cable

Description

Designed for use within buildings, data centers, telecom rooms, and workstations, this cable is available with both Riser and Plenum rated jackets. Factory-terminated to custom lengths, it significantly reduces installation time and labor costs by eliminating the need for on-site terminations or terminated with MTP, MPO.

Availale in SM / MM (OM1. OM2, OM3. OM4)

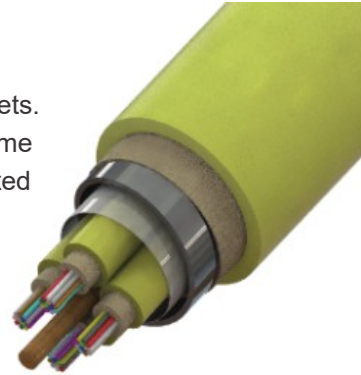

Spec.

Fiber Counts	12~48	24~96
Fiber Color	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification	
Fibers in each tube	12	24
Fiber Color	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification	
Strength memeber	Aramid Yarn + Water Blocing yarn	
Sub-unit Dia.	2.3 ±0.3mm	2.8 ±0.3mm
Sprial Armored Dia.	7.0 ±0.3mm	7.5 ±0.3mm
Cable O.D. (Non Se	9.3 ±0.3mm	9.6 ±0.3mm
Jacket Color	Aqua, Yellow, Black, Orange	
Jacket Material	PE / LSZH / PVC	
Weight (kg/km)	~45 kg/km	
Max. Tensile Load	≥300N	
Mini. Bend Radius	~10 Ø(Cable O.D.)	
Operation Temp.	-20 ~ +70°C	
Storage Temp.	-20 ~ +80°C	