


Distribution 900um

Description

Designed for use within buildings, data centers, telecom rooms, and workstations, this cable is available with both Riser and Plenum rated jacket. Factory-terminated to custom lengths, it significantly reduces installation and labor costs by eliminating the need for on-site terminations.

Available in SM / MM (OM1, OM2, OM3, OM4)

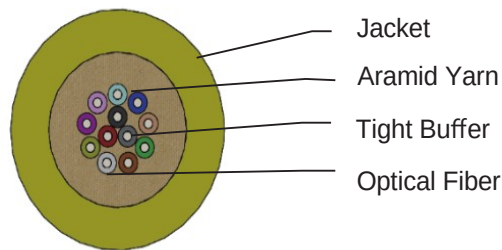

Spec.

Fiber Counts	2	6	12	24
Fiber Color	Natural			
Tight Buffer (mm)	0.9 ± 0.1			
Tight Buffer Color	(1-12) BL, OR, GR, BR, GR, WH, R, BK, YL, Pur, Pk, Aq / (13-24) Plus dot identification			
Strength member	Aramid Yarn + Water Blocking yarn			
Cable O.D.	4.2 ± 0.3mm	4.2 ± 0.3mm	5.8 ± 0.3mm	8.1 ± 0.3mm
Jacket Color	Aqua, Yellow, Black, Orange			
Jacket Material	PE / LSZH / PVC			
Flammability	OFNR / OFNP / CPR Cca			
Weight (kg/km)	~15 kg/km	~28 kg/km	~40 kg/km	~66 kg/km
Max. Tensile Load	≥ 535N	≥ 535N	≥ 600N	≥ 600N
Mini. Bend Radius	~10 Ø(Cable O.D.)			