

Flat Drop Cable, Toneable



Description

Flat Drop Cable – Engineered for Versatility and Durability

Designed for self-supporting aerial, direct-buried, and duct installations, this cable is ideal for drop applications where quick access and easy handling are essential.

PE outer jacket, enhanced with protective additives, ensures excellent resistance to UV exposure, abrasion, fungus, and harsh

An integrated copper toning wire enables fast and accurate location of buried cables.

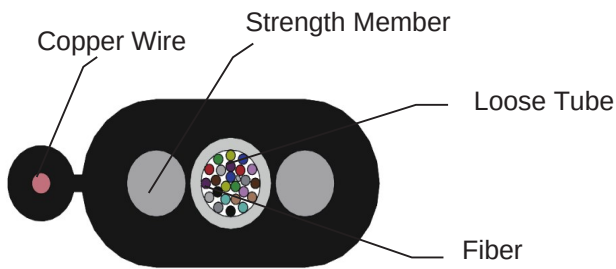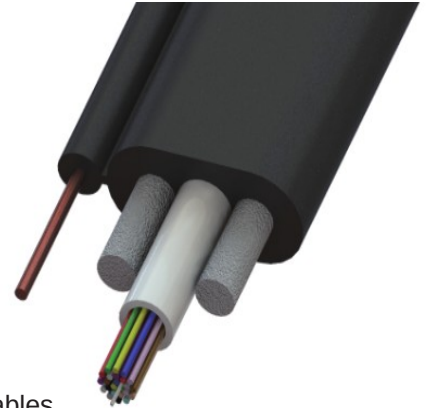

Spec.

Fiber Counts	2~24
Fiber Color	(1-12) BL, OR, GR, BR, GR, WH,R, BK, YL, Pur, Pk, Aq / (13-24) with Dot identification
Loose Tube Dia.	2.8±0.5mm
Loose Tube material	PBT/Nature
Copper Wire	24AWG
Water-Blocking	Water blocking Yarn
Strength memeber	Dielectric FRP 1.5mm x 2
Cable O.D.	4.5 x10.5 mm ± 0.8mm
Jacket Color	Black
Jacket Material	PE
Weight (kg/km)	~30
Max. Tensile Load	≤1350N
Mini. Bend Radius	~ 60mm