
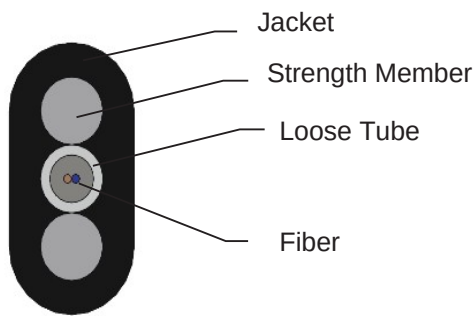


Flat Drop Cable (FTTH)

Description

Flat Drop Cable – Engineered for Versatility and Durability
Designed for self-supporting aerial, direct-buried, and duct installations, this cable is ideal for drop applications where quick access and easy handling are essential.

PE outer jacket, enhanced with protective additives, ensures excellent resistance to UV exposure, abrasion, fungus, and harsh

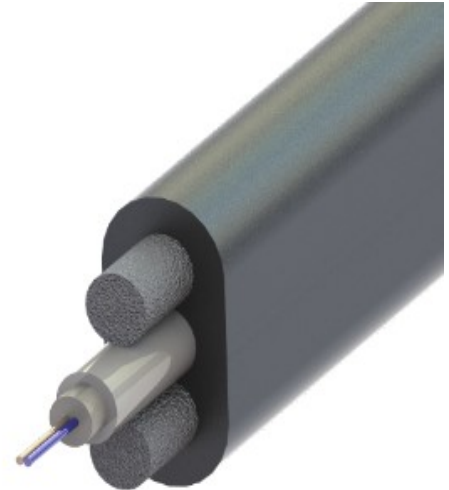

Spec.

Fiber Counts	2~24
Fiber Color	Blue, Orange,
Loose Tube Dia.	2.8±0.5mm
Tube Material/Color	PBT/Nature
Water-Blocking	Water blocking Yarn
Strength memeber	Dielectric FRP 1.5mm x 2
Cable O.D.	4.0 x8.0 mm ± 0.5mm
Jacket Color	Black
Jacket Material	PE
Weight (kg/km)	~30
Max. Tensile Load	≤1350N
Mini. Bend Radius	~ 60mm