


2F, Round Drop (EU Type)

Description

The FTTH Round Drop Cable features tight-buffered fiber available in various colors. It is ideal for a wide range of indoor and outdoor fiber optic distribution and patching applications, and can also be terminated with an SC/APC shutter connector for enhanced protection and performance.

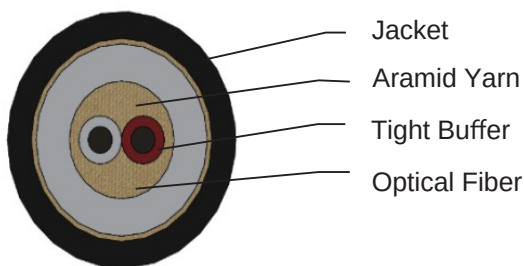

Spec.

Fiber Counts	1	2
Fiber Color	Natural	
Tight Buffer (mm)	0.9 ± 0.1	
Tight Buffer Color	White	Blue, Orange
Strength member	Aramid Yarn + Water Blocking yarn	
Inner Jacket Dia.	3.4 ± 0.2mm	
Cable O.D.	3.0 ± 0.2mm	4.5 ± 0.2mm
Jacket Color	Aqua, Yellow, Orange, Black	
Jacket Material	LSZH / PVC / TPU	
Flammability	OFNR (In/Outdoor) / Dca	
Weight (kg/km)	~15 kg/km	
Max. Tensile Load	≥800N	
Mini. Bend Radius	~10 Ø(Cable O.D.)	